



The SPN5M SMART controller is an ECU (Electronic Control Unit) equipped with smart high side mosfets. It can handle up to 16 inputs and up to 16 outputs.

It can be easily and quickly implemented in a CAN BUS network as SLAVE, with CANopen protocols.

The polyurethane resin case makes the controller suitable for use on machines that operate in harsh work environments.



TECHNICAL FEATURES

MASTER CODE	SP.5MS.426
POWER SUPPLY	9-36 VDC – 30mA @ 24 VDC (STANDBY MODE)
INPUT	<p>TOTAL No. 16 INPUTS, SOFTWARE CONFIGURABLE AS:</p> <ul style="list-style-type: none"> • UP TO 16 DIGITAL INPUTS (HIGH SIDE) • UP TO 4 DIGITAL INPUTS (LOW SIDE) • UP TO 14 ANALOGIC INPUTS (0~40V) • UP TO 4 ANALOGIC INPUTS (4~20mA) • UP TO 2 FREQUENCY INPUTS (1~1000Hz)
OUTPUT	<p>TOTAL No. 16 OUTPUTS, SOFTWARE CONFIGURABLE AS:</p> <ul style="list-style-type: none"> • UP TO 8 PWM HIGH SIDE OUTPUTS • UP TO 16 HIGH SIDE OUTPUTS (MAX 2A FOR EACH OUTPUT PIN) → MAX TOTAL HIGH SIDE OUTPUTS CURRENT 10 A) • UP TO 4 DIGITAL LOW SIDE OUTPUT (MAX 500mA FOR EACH OUTPUT PIN)
CAN BUS	No. 1 PORT: 2.0B COMPLIANT - (11, 29 BIT) - ISO 11898 - UP TO 1MBIT/S
CAN BUS PROTOCOLS	CAN OPEN (CIA DS401 DEVICE PROFILE FOR GENERIC I/O MODULE, WITH DS306 EDS FILE)
OPTIONALS	RTC (real time clock) Additional 2nd CAN-BUS PORT
CONNECTION <i>See «MATING CONNECTORS» table</i>	MOLEX 48 PIN CONNECTOR
CASE	PUR UL94-V0
PROTECTION	IP68
WORKING TEMPERATURE	-40°C +85°C









ELECTRONIC FEATURES

SLAVE USAGE	EDS FILE
PROGRAMMING	FIRMWARE UPLOAD BY CAN BUS WITH ALOADER SOFTWARE TOOL
CYCLE TIME	Less than 0,5 ms
CPU	PIC 16 bit
INTERNAL MEMORY	FLASH: 192 KB (PROGRAM MEMORY: 164 KB) EEPROM: 64 KB



STANDARDS

DIRECTIVE	2014/30/EU (EMC)
ELECTROMAGNETIC COMPATIBILITY	EN 50498
ELECTROMAGNETIC EMISSIONS	EN 61000-6-4
ELECTROMAGNETIC IMMUNITY	EN 61000-6-2
ROAD VEHICLES ELECTRICAL DISTURBANCES FROM CONDUCTION AND COUPLING — PART 2	ISO 7637-2: 2011
ROAD VEHICLES COMPONENT TEST METHODS FOR ELECTRICAL DISTURBANCES FROM NARROWBAND RADIATED ELECTROMAGNETIC ENERGY — PART 1	ISO 11452-1: 2005
PERFORMANCE AND SAFETY INTEGRITY LEVEL	PLc – SIL1 (SINGLE-CHANNEL INTERNAL SCHEME)


SIZE (mm)

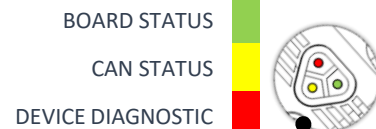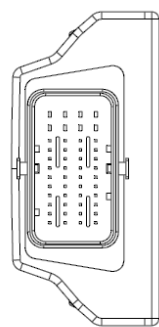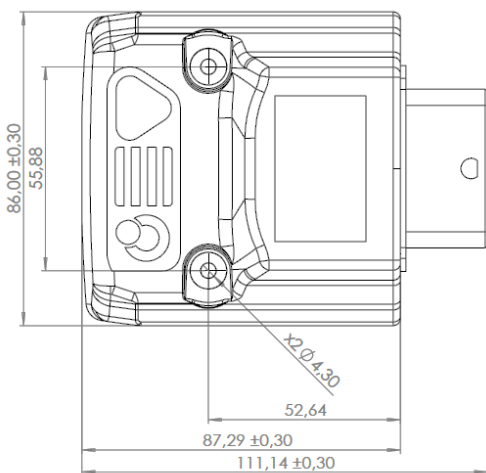

Fix the unit with Hex socket head screws of stainless steel and a sealing washer.

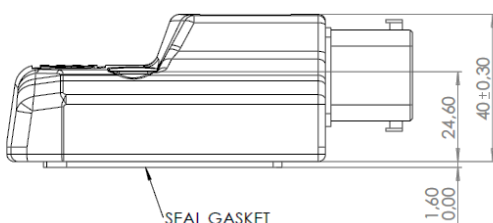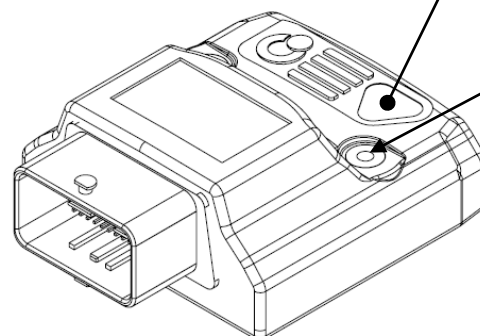

SEAL GASKET

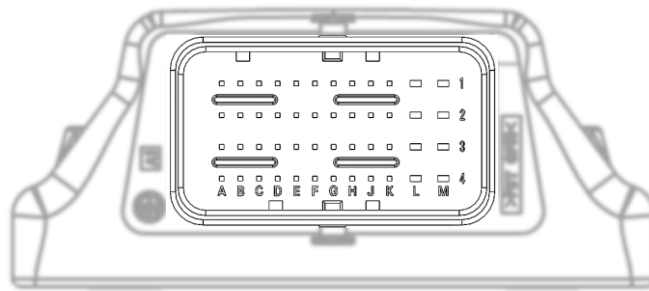

48 PINS CONNECTOR PINOUT TABLE

PIN	A	B	C	D	E	F	G	H	J	K	L	M
1	DIGITAL / PWM OUTPUT 13	SUPPLY OUTPUTS 9...16	DIGITAL / PWM OUTPUT 12	DIGITAL / PWM OUTPUT 11	DIGITAL / PWM OUTPUT 10	DIGITAL / PWM OUTPUT 9	GND POWER SUPPLY	DIGITAL OUTPUT 8	DIGITAL OUTPUT 7	DIGITAL OUTPUT 6	SUPPLY OUTPUTS 1...8	DIGITAL OUTPUT 4
2	DIGITAL / PWM OUTPUT 14	INPUT 9 0...40Vdc/ DIGITAL	INPUT 8 0...40Vdc/ DIGITAL	INPUT 7 0...40Vdc/ DIGITAL	INPUT 6 4...20mA / 0...40Vdc/ DIGITAL	INPUT 5 4...20mA / 0...40Vdc/ DIGITAL	INPUT 4 4...20mA / 0...40Vdc/ DIGITAL	INPUT 3 4...20mA / 0...40Vdc/ DIGITAL	INPUT 2 0...40Vdc/ DIGITAL	INPUT 1 0...40Vdc/ DIGITAL	DIGITAL OUTPUT 5	DIGITAL OUTPUT 3
			DIGITAL OUTPUT LOW SIDE 4	DIGITAL OUTPUT LOW SIDE 3					DIGITAL OUTPUT LOW SIDE 2	DIGITAL OUTPUT LOW SIDE 1		
3	DIGITAL / PWM OUTPUT 15	INPUT 10 0...40Vdc/ DIGITAL	FREQ / DIGITAL INPUT 11	FREQ / DIGITAL INPUT 12	INPUT 13 0...40Vdc/ DIGITAL	INPUT 14 0...40Vdc/ DIGITAL	INPUT 15 0...40Vdc/ DIGITAL	INPUT 16 0...40Vdc/ DIGITAL	CAN2H*	CAN2L*	GND POWER SUPPLY	DIGITAL OUTPUT 2
4	DIGITAL / PWM OUTPUT 16	SENSOR POWER SUPPLY	SENSOR POWER SUPPLY	SENSOR POWER SUPPLY	GND	GND	GND	CAN1H	CAN1L	DEVICE POWER SUPPLY (+)	GND	DIGITAL OUTPUT 1

NOTES :

- «FREQ» means «frequency»
- (*) : CAN PORT 2 is an optional available on request
- Sensor power pins have the reference power supply voltage, MAX 200mA
- GND pins are connected together

TERMINAL WIRE SIZE: follow the manufacturer's mating connector specification

- from A1 to J4: 0.75 mm²
- from L1 to M4: 2.0 mm²

MATING CONNECTORS – MOLEX CODES

CONNECTOR	64320-3311
TERMINALS	64323-1029 (x8) 64322-1029 (x40)
WIRE CAP	64320-1301
ALMEC PRE-WIRED CONNECTOR	CNN.ML.48P.R.VD.CB (red cable) CNN.ML.48P.B.VD.CB (blue cable)





ALMEC
MECHATRONICS

NOTE