



This series of industrial Monitors comply with the consistent industrial standards, with 10.1" ~ 27" options, offering a very competitive price. Support embedded, desktop, wall mounted and other diversified installation methods to meet the application needs of different devices in different environments.



Features >>

- Modern design, with grey painted aluminium bezel and back metal cover with VESA fixing. Conform to EMC anti electromagnetic interference standard.
- Front IP65 industrial protection, applicable to various harsh environments.
- Supporting 12V power supply (12/24V on 27");
- Most common used interface ports.
- Competitive price.



Product Model >>

Product size	Reference	Resolution	Screen Scale	Brightness	Contrast ratio	Viewing Angle	Dimensions (mm)	Weight (kg)
10.1"	GPV-EME-101	1280x800	16:9	350cd/m ²	800:1	85/85/85/85 (L/R/U/D)	168.4 x 249.8	3.5
15"	GPV-EME-150	1024*768	4:3	300cd/m ²	1500:1	85/85/85/85 (L/R/U/D)	274.4 x 348.4	4.0
15.6"	GPV-EME-156	1920*1080	16:9	220cd/m ²	800:1	85/85/85/85 (L/R/U/D)	245.5 x 388.2	4.5
17"	GPV-EME-170	1280*1024	5:4	350cd/m ²	1000:1	85/85/80/80 (L/R/U/D)	316.6 x 384.2	4.0
18.5"	GPV-EME-185	1366*768	16:9	250cd/m ²	1000:1	85/85/80/80 (L/R/U/D)	286.3 x 453.7	6.0
19"	GPV-EME-190	1280*1024	5:4	250cd/m ²	1000:1	85/85/80/80 (L/R/U/D)	350.6 x 425.9	5.2
21.5"	GPV-EME-215	1920*1080	16:9	250cd/m ²	3000:1	89/89/89/89 (L/R/U/D)	317.6 x 526.0	6.0
23.6"	GPV-EME-236	1920*1080	16:9	300cd/m ²	3000:1	89/89/89/89 (L/R/U/D)	350.0 x 574.0	8.0
27"	GPV-EME-270	1920*1080	16:9	300cd/m ²	3000:1	89/89/89/89 (L/R/U/D)	400.0 x 656.0	9.15

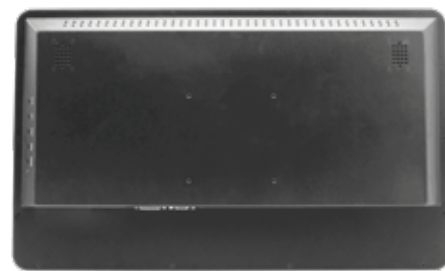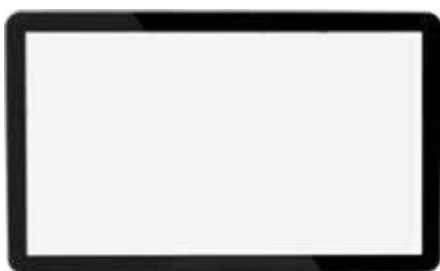

Product Installation >>



Embedded installation



Wall mounted installation



Desktop installation



Louver installation



Cantilever installation



Boom type installation

Product Specifications >>

Hardware Configuration

Key functions	AUTO, MENU, POWER, LEFT, RIGHT
Menu language	English
Audio	stereo 1+1 W
Front protection	IP65
MTBF	50,000 hours

Touch Screen

Capacitive Touch	Type of touch screen: projection capacitive touch screen Accuracy: 2 mm Minimum touch area: 7 mm diameter Minimum touch force: 10 g Input mode: handwriting or capacitive pen or thin gloves Surface hardness: Mohs hardness 7H (according to ATSM D3363 standard) Touch times: ≥35 million times
------------------	---

Environmental

Working Temperature	0 °C ~ 50 °C
Storage Temperature	-20 °C ~ 60 °C
Operating Humidity	Humidity: 20 % ~ 80 % Non-Condensing
Anti-interference	EMI/EMC interference detection standard
Anti vibration	5-19HZ/1.0mm amplitude; 19-200HZ/1.0g acceleration
Impact resistance	10g acceleration, 11ms period

Other

Power Input	AC 100-240V 50/60Hz adapter - passed CE certification
Power Output	DC 12V / 5A
Rated Power	10-27W (depending on LCD size)
Fuselage Properties	Body material: steel alloy, Body color: black
Warranty Policy	One year free, extendable to 2 or 3 years on request
Installation Method	Embedded installation is recommended, supporting wall mounted, desktop mounted, cantilever mounted, boom mounted, etc

I/O Interface

DC	1x DC, 12V (12V-24V for 27")
HDMI	1x HDMI I, high-definition audio digital signal transmission, support HDMI data input, maximum support 1080P
VGA	1x VGA, Analog signal transmission, supporting the best resolution of VGA
DVI	1x DVI I, digital signal transmission, supporting the best resolution of DVI digital signal
TOUCH	1x TOUCH, USB-B
AUDIO I/O	1x AUDIO I/O, 3.5mm standard interface

Interface Distribution >>



Only the 15 inch interface is displayed. Please refer to the actual object for details.
* All specifications and photos are subject to change without notice.