



The SPN8 controller is an ECU (Electronic Control Unit) which can handle up to 24 inputs and up to 20 outputs.

Easy to program, using the ALMEClab development platform, it can be implemented in a CAN network, as MASTER or SLAVE.

The polyurethane resin case makes the controllers suitable for use on machines that operate in harsh work environments.

It's E3 certified UNECE regulation 10 automotive.



TECHNICAL FEATURES			
MASTER CODE		SPN.8	
POWER SUPPLY		9-36 VDC / CURRENT CONSUMPTION 30 mA AT 24 VDC (STAND BY MODE)	
INPUT	TOTAL 24	MAX 8 ANALOGIC INPUT WITH 0..40 V and 4..20 mA CAPABILITY	RESOLUTION FOR 0..40V INPUT: 10mV
		MAX 8 ANALOGIC INPUT WITH 0..40 V CAPABILITY	RESOLUTION FOR 4..20mA INPUT: 20uA
		MAX 6 OPTO-COUPLED DIGITAL HIGH/LOW SIDE INPUTS	FREQUENCY RANGE FOR COUNTER (1-1000Hz)
		MAX 2 OPTO-COUPLED DIGITAL HIGH SIDE INPUTS WITH PULSE COUNTER	THRESHOLD FOR DIGITAL IN: SW CONFIGURABLE
OUTPUT	TOTAL 20	MAX 12 DIGITAL / PWM OPEN-LOOP / CURRENT CLOSED LOOP	SINGLE OUTPUT MAX CURRENT : 4A TOTAL CURRENT MAX: 16A
		MAX 4 DIGITAL / PWM OPEN-LOOP / CURRENT CLOSED LOOP SAFETY - REDUNDANT OUTPUT STAGE	
		MAX 4 DIGITAL HIGH SIDE LOW CURRENT OUTPUTS	LOW CURRENT OUTPUT CURRENT: 2A TOTAL CURRENT MAX: 4A
CAN BUS		1 PORT: 2.0B COMPLIANT - (11, 29 BIT) - ISO 11898 - UP TO 1MBIT/S	
CAN BUS PROTOCOLS		CAN OPEN (CIA DS401 DEVICE PROFILE FOR GENERIC I/O MODULE, WITH DS306 EDS FILE)	
OPTIONAL ADDITIONAL PORTS		No.1 SERIALRS232 PORT No.1 CAN-BUS PORT 2.0B COMPLIANT - (11, 29 BIT) - ISO 11898 - UP TO 1MBIT/S	
CONNECTION		1 MOLEX 32 PIN	
See «COUPLING CONNECTORS» table		1 MOLEX 48 PIN	
WORKING TEMPERATURE		-40°C + 85°C	
CASE MATERIAL		ENCAPSULATED IN PUR RESIN - SELF-EXTINGUISHING UL94 (V0)	





ELECTRONIC FEATURES


SLAVE USAGE	EDS FILE
MASTER USAGE	ALMEClab
	STANDARD C PROGRAM LANGUAGE
PROGRAMMING	FIRMWARE UPLOAD BY CAN BUS WITH ALOADER SOFTWARE TOOL
CYCLE TIME	1 ms
CPU	FAMILY: ARM CORTEX M4, 32BIT CORE, 120 MHz CLOCK FREQUENCY
INTERNAL MEMORY	FLASH (PROGRAM MEMORY): 1 MB RAM MEMORY: 128 KB

STANDARDS

ELECTROMAGNETIC EMISSIONS	EN 61000-6-4
ELECTROMAGNETIC IMMUNITY	EN 61000-6-2
ROAD VEHICLES — ELECTRICAL DISTURBANCES FROM CONDUCTION AND COUPLING — PART 2	ISO 7637-2: 2011
ROAD VEHICLES — COMPONENT TEST METHODS FOR ELECTRICAL DISTURBANCES FROM NARROWBAND RADIATED ELECTROMAGNETIC ENERGY — PART 1	ISO 11452-1: 2005
VERIFICATIONS AND TESTS PERFORMED ACCORDING TO THE REQUIREMENTS OF UNECE REGULATION 10 - AMENDMENT 06 - SUPPLEMENT 0	E3 – TYPE APPROVAL
BOX IP	IP68
MTTFd CALCULATED ACCORDING TO THE IEC61709 (SIEMENS SN29500), WITH ENVIRONMENTAL FACTORS 3K7 (IEC60721)	115,34 YEARS
PERFORMANCE AND SAFETY INTEGRITY LEVEL	PLc – SIL1 (SINGLE-CHANNEL INTERNAL SCHEME)


SIZE (mm)

- BOARD / APPLICATION STATUS
- CAN STATUS
- BOARD DIAGNOSTIC (256 DISPOSABLE CODE MANAGE FROM PLC)

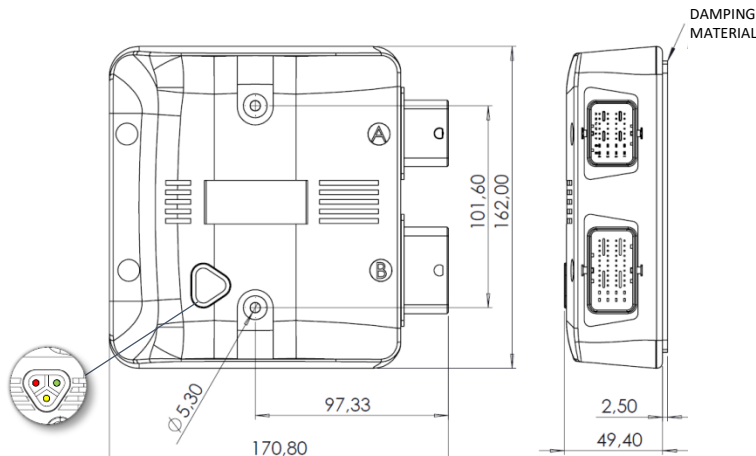




A
CONNECTOR
48 PINS



B
CONNECTOR
32 PINS

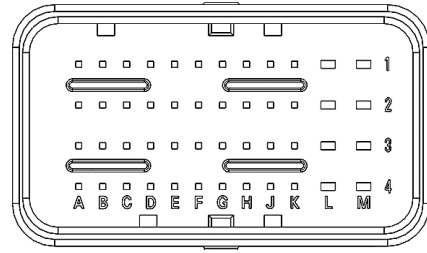

32 PINS CONNECTOR



PIN	A	B	C	D	E	F	G	H
1	DIGITAL / PWM OUTPUT 2	DIGITAL / PWM OUTPUT 3	SUPPLY OUTPUTS 3/4	DIGITAL / PWM OUTPUT 4	DIGITAL INPUT 9	GND	DIGITAL / PWM OUTPUT 5	SUPPLY OUTPUTS 5/6
2	SUPPLY OUTPUTS 1/2	SENSOR POWER SUPPLY	SENSOR POWER SUPPLY	SENSOR POWER SUPPLY	GND	GND	GND	GND
3	DIGITAL / PWM OUTPUT 1	DIGITAL INPUT 5	DIGITAL INPUT 4	DIGITAL INPUT 3	DIGITAL INPUT 2	DIGITAL INPUT 1	GND	DIGITAL / PWM OUTPUT 6
4	DIGITAL INPUT 6	DIGITAL INPUT 7	DIGITAL INPUT 8	DIGITAL HIGH SIDE OUTPUT 13A	DIGITAL HIGH SIDE OUTPUT 13	DIGITAL HIGH SIDE OUTPUT 14A	DIGITAL HIGH SIDE OUTPUT 14	SUPPLY OUTPUTS 13/13A 14/14A

48 PINS CONNECTOR



PIN	A	B	C	D	E	F	G	H	J	K	L	M
1	DIGITAL HIGH SIDE OUTPUT 16A	SUPPLY OUTPUTS 15/15A/16/16A	SENSOR POWER SUPPLY	DIGITAL / PWM OUTPUT 7	SUPPLY OUTPUTS 7/8	DIGITAL / PWM OUTPUT 8	GND	DIGITAL / PWM OUTPUT 9	GND	SUPPLY OUTPUTS 9/10	GND	DIGITAL / PWM OUTPUT 10
2	DIGITAL HIGH SIDE OUTPUT 16	SENSOR POWER SUPPLY	SENSOR POWER SUPPLY	SENSOR POWER SUPPLY	SENSOR POWER SUPPLY	GND	GND	GND	GND	GND	GND	DIGITAL / PWM OUTPUT 11
3	DIGITAL HIGH SIDE OUTPUT 15	DIGITAL INPUT 10	DIGITAL INPUT 11/SERIAL TX*	DIGITAL INPUT 12/SERIAL RX*	DIGITAL INPUT 13	DIGITAL INPUT 14	DIGITAL INPUT 15/CAN2H*	DIGITAL INPUT 16/CAN2L*	CANH	CANL	GND	SUPPLY OUTPUTS 11/12
4	DIGITAL HIGH SIDE OUTPUT 15A	ANALOGIC INPUT 1	LOGIC POWER SUPPLY	ANALOGIC INPUT 2	ANALOGIC INPUT 3	ANALOGIC INPUT 4	ANALOGIC INPUT 5	ANALOGIC INPUT 6	ANALOGIC INPUT 7	ANALOGIC INPUT 8	GND	DIGITAL / PWM OUTPUT 12

COUPLING CONNECTORS

	32 PIN	48 PIN
CONNECTOR	64319-3211	64320-3311
TERMINAL	64323-1029 (x8)	64323-1029 (x8)
	64322-1029 (x24)	64322-1029 (x40)
WIRE CAP	64319-1201	64320-1301



64319-3211 64320-3311 64323-1029 64322-1029 64319-1201 64320-1301

*PIN CONFIGURATION BASED ON THE DEVICE VERSION



ALMEC
MECHATRONICS

NOTE